


OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 20 TOWNSHIP 14 RANGE 5  
DATE: --8-6-99-- 9-25-04  
PARTY CHIEF: --Kiste-- Wilcoxen  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Harrison w/sec.cor.cap  
METHOD OF ESTABLISHMENT: County 6-14-93

IN. S.P.C. E ZONE, NAD 83  
NAME: 14052004  
N: 488151.9908(m)  
E: 70607.3940(m)

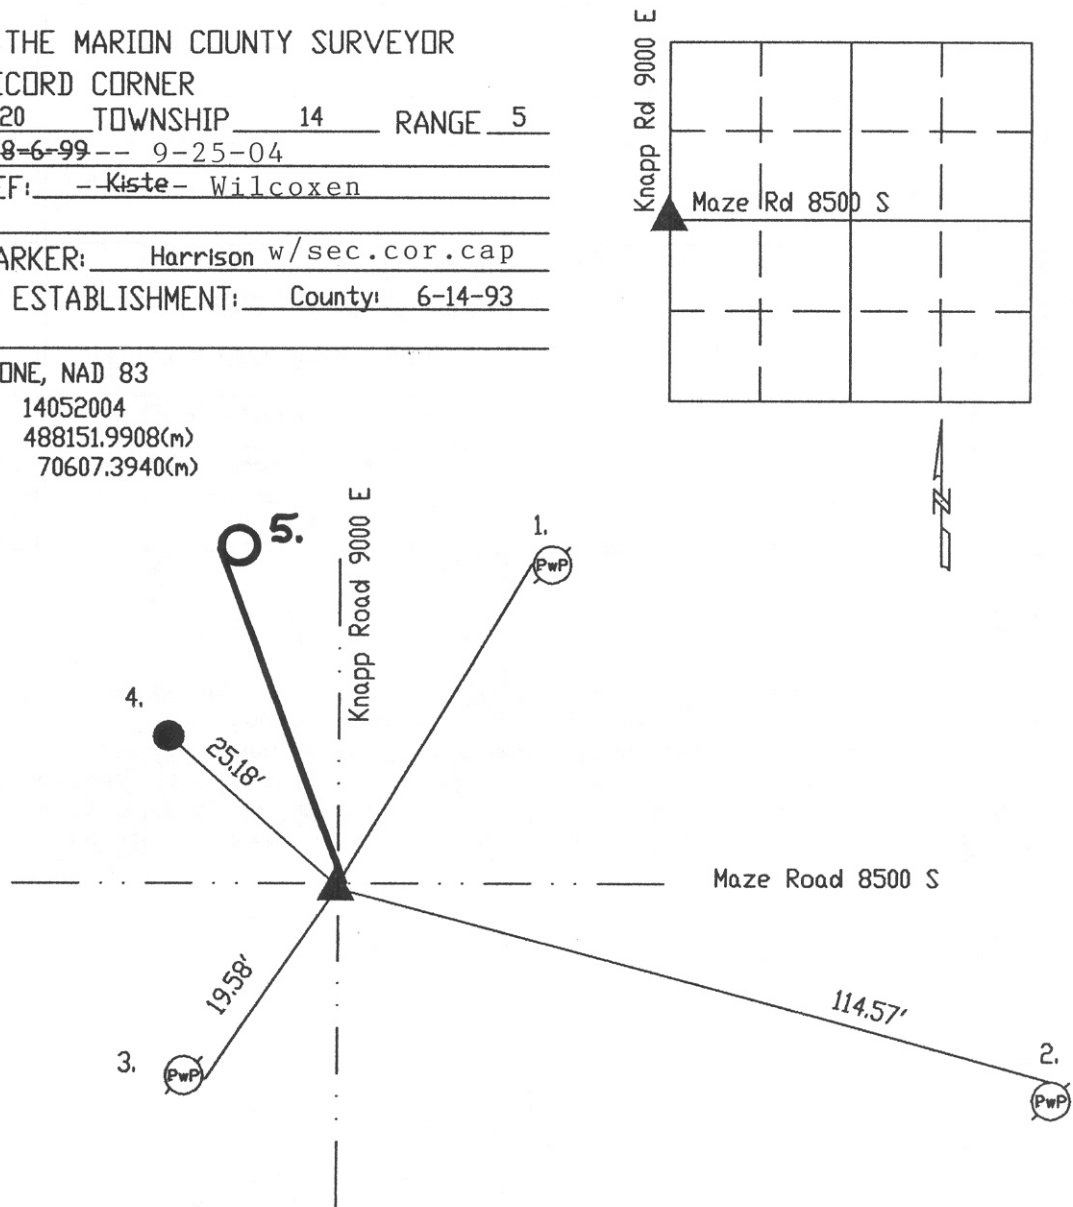

Original post set 1820 by John Hendricks with witnesses: 7' beech S 10 E 19 links, 5' beech N 14 W 4 links per Marion County Atlas pg. 13. Blount 4-21-10 called E Q corner of Section 19-14-5 stone found per Franklin Township Legal Survey Book pg. 49. 1-29-60 called stone 18' down. 6-2-70 called pipe over stone. 12-8-80 called stone 20' down and railroad spike at surface, found .20'W & .10'N. Excavated 7-29-88, PK nail found at surface, railroad spike found under nail, stone found 17' down & .20'N and .10'W of PK nail. Set Harrison 7-29-88. Re-tied by Wilcoxen 6-14-93. Re-tied by Kiste 8-6-99.

HC452004

REF.	DISTANCE	DESCRIPTION
1.	47.11'	PK nail W PwP#25-801A 24'up
2.	114.57'	PK nail N PwP#1-831A 14'up
3.	19.58'	PK nail E PwP#40-831 12'up
4.	25.18'	1' steel pin at pavement edge
5.	85.05'	Mag nail w/bw W PwP no# w/siren